


PCTWORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶: B65H 37/00	A1	(11) International Publication Number: WO 96/15060 (43) International Publication Date: 23 May 1996 (23.05.96)
(21) International Application Number: PCT/US95/14539 (22) International Filing Date: 8 November 1995 (08.11.95) (30) Priority Data: 9422905.1 14 November 1994 (14.11.94) GB (71) Applicant (for all designated States except US): THE GILLETTE COMPANY [US/US]; Prudential Tower Building, Boston, MA 02199 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): STEVENS, Christopher, John [GB/GB]; 8 The Willows, Caversham, Reading, Berkshire RG4 8BD (GB). WHITE, Robert [GB/GB]; 69 Ilges Lane, Cholsey, Oxford OX10 9PA (GB). (74) Agents: GALLOWAY, Peter, D.; Ladas & Parry, 26 West 61st Street, New York, NY 10023 (US) et al.	(81) Designated States: AL, AM, AT, AU, BB, BG, BR, BY, CA, CH, CN, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IS, JP, KE, KG, KP, KR, KZ, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TT, UA, UG, US, UZ, VN, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG), ARIPO patent (KE, LS, MW, SD, SZ, UG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: TAPE DISPENSER**(57) Abstract**

A tape dispenser, e.g. a correction tape dispenser, has a tip element (4) defining an edge (5) around which passes the tape (1) including the correction composition carried on a carrier ribbon, the tip edge being used to press the tape against a surface onto which the correction composition is to be transferred as a strip or band, and the tip element (4) being mounted, such as by plastic hinge (10), to allow pivotal movement of the tip about an axis Y substantially perpendicular to the surface and spaced in front of the tip edge (5).

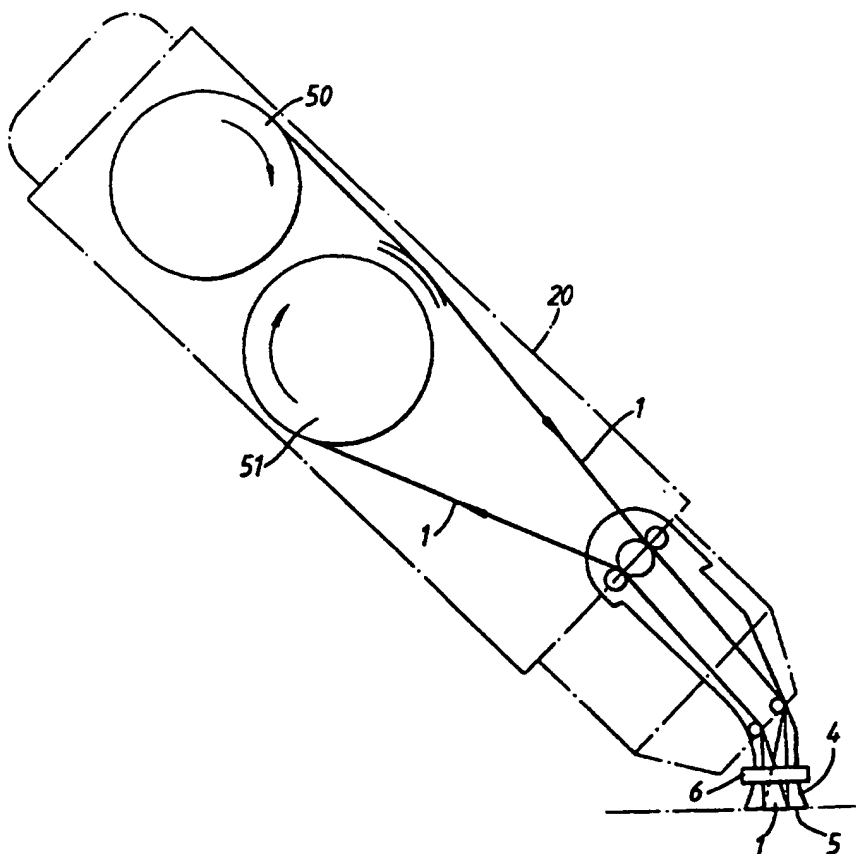

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

- 1 -

TAPE DISPENSER

This invention is concerned with tape dispensers for applying a coating composition as a strip or band to a substrate. For example, there are known so-called correction tape dispensers in which supply and take-up spools for a plastics carrier ribbon onto one side of which a correction composition is initially coated are housed in a holder which is held in the hand during use. In passing from the supply spool to the take-up spool the carrier ribbon passes around an edge defined by an application element and by means of which the ribbon is pressed against the surface of a sheet of paper in order to transfer the coating composition onto the paper such as to facilitate the correction of a mistake made during writing. The edge of the applicator element defines a sharp bend in the ribbon path to assist the release of the coating composition from the ribbon. As the edge is moved across the paper, fresh coated ribbon is drawn from the supply spool while the take-up spool is driven to wind up the ribbon which the edge has passed over and hence from which the coating composition has been removed. Thus, a straight continuous strip of coating composition is laid down on the paper

- 2 -

surface until the forward movement of the application element is stopped and it is lifted away from the paper. The correction tape dispensers currently available work generally satisfactorily, but they are not without their drawbacks. Some require the holders to be held in rather unnatural or awkward orientations. In addition, some care or skill is needed to ensure that the edge remains flat on the surface when laying down a strip of coating composition otherwise it may not release correctly from the ribbon with the result that the strip laid down onto the paper will be ragged or incomplete. To overcome this problem it has been proposed in our copending International patent application No. PCT/US94/06585 to mount the application element for pivotal movement about an axis ideally disposed substantially in the plane of the paper and perpendicular to the edge.

Another drawback suffered by known correction tape dispensers is that the edge must be initially oriented and maintained substantially perpendicular to the direction of movement of the applicator tip across the paper surface when laying down a strip of coating composition otherwise there is a strong tendency for the tape to slide along the edge, possibly becoming disengaged from it completely, which again will detract from smooth operation of the dispenser.

The present invention addresses the latter drawback and as a solution it proposes a tape dispenser for applying a strip of a coating composition to a substrate, comprising a holder containing a supply spool of tape consisting of a carrier ribbon coated on one side with the coating composition, and a take-up spool for used tape consisting of carrier ribbon from

- 3 -

which the coating composition has been removed,
the tape being guided to pass between the supply
and take up spools around an edge of an
application tip element used to press the
5 carrier ribbon against the substrate to transfer
the coating composition onto the substrate,
wherein the application tip element is coupled
to the holder for movement about a predetermined
axis substantially aligned with the direction in
10 which the application tip element is pressed
against the substrate in use of the dispenser,
whereby frictional forces exerted on the
application tip element during movement of the
application tip element across the substrate
15 surface cause the application tip element to
move about said predetermined axis to maintain
the edge substantially perpendicular to the
direction of said movement of the application
tip element across the substrate surface.

20 By providing the application tip
element with some freedom of movement about a
generally upright predetermined axis, the
element is able to adjust and compensate for
failure of the user to present the edge against
25 the substrate to lie perpendicular to the length
of the strip of composition to be laid down,
and/or to maintain this orientation of the edge
throughout the length of displacement of the
edge across the surface. In order to encourage
30 the automatic adjustment of the application
element under the effect of the frictional
forces it experiences during the operation of
laying down a strip of coating composition, the
axis is preferably defined at a position spaced
35 at a small distance in front of the edge of the
application tip element. The predetermined axis
can be defined by a bearing means, such as a

- 4 -

shell bearing, but in an especially convenient construction the axis is defined by an integral hinge. The hinge is preferably adapted to bias the application tip element to a central rest
5 position from which the element is angularly displaceable about the axis in both directions. However, separate or alternative spring means could be provided for this purpose, and the tension of the tape itself can have a centering
10 effect on the application tip element.

A tape dispenser constructed in accordance with the present invention can also embody the invention of the aforementioned copending application No. PCT/US94/06585. Thus,
15 in a currently preferred embodiment, the application tip element of the tape dispenser is also pivotable relative to the holder about a pivot axis substantially perpendicular to the edge of the application tip element and
20 substantially perpendicular to the first mentioned predetermined axis.

A better understanding of the invention and its preferred features will be gained from the more detailed description which
25 follows reference being made to the accompanying drawings, in which:

Figure 1 shows schematically a correction tape dispenser according to the invention;

30 Figure 2A is a perspective view illustrating a first embodiment of the present invention;

Figure 2B is a plan view of the correction tape dispenser applicator tip
35 assembly shown in Figure 2;

Figure 3 is an exploded perspective view showing a modified applicator tip assembly

- 5 -

similar to the embodiment of Figure 2;

Figure 4 is a perspective view showing another embodiment of the invention which also includes a bearing as described in the
5 aforementioned International application No. PCT/US94/06585 to enable the applicator tip to rock to adjust itself to lie flat against a surface without demanding that the body of the dispenser is held in a strictly predetermined
10 orientation relative to the paper;

Figure 5 is an exploded perspective illustration of the applicator tip assembly incorporated in the Figure 4 embodiment;

Figures 6A and 6B are sketches showing
15 the two freedoms of movement permitted by the tip assembly of Figures 4 and 5;

Figure 7 shows in perspective an applicator tip similar to Figure 3 but adapted to enable rocking motion of the applicator tip element as in the embodiment of Figures 4-6.
20

The dispenser generally illustrated in Figure 1 comprises a body or holder 20 housing tape supply and take-up spools 30, 31 which are most conveniently rotatable about parallel axes
25 as shown, or a common axis, and are coupled by a slipping drive mechanism so that when the tape 1 is drawn from the supply spool 50 the take-up spool 51 is rotated to reel in an equal amount of tape. The tape 1 is conventional having a
30 layer of correction composition coating one side of a carrier ribbon. Shown in Figures 2A and 2 is the tape applicator tip assembly of the correction tape dispenser. A length of tape extending between the supply and take-up spools
35 is guided to pass around an application tip element 4 defining an edge 5 which is used to press the tape against a paper surface and which

- 6 -

forms a sharp bend in the tape path to facilitate release of the correction composition from the carrier ribbon and hence its transfer to the paper surface. The element consists of a blade member integral with a support ring 6 through which tape guidance slots 7 and 8 are provided either side of the blade member. At a position at 90° to the plane of the edge 5, the support ring is connected to a mounting part in the form of a post 9 by an integral hinge 10 which defines a predetermined axis Y, referred to herein below as the yaw axis, substantially aligned with the direction in which the application tip element is pressed against the substrate in use of the dispenser. The tape 1 is guided to pass from the supply spool, down through the slot 7, around the edge 5, up through the slot 8 and then onto the take-up spool. In use, the edge 5 is pressed down onto the paper surface by means of the holder of the dispenser to which the mounting post 9 is substantially rigidly attached, and the edge is moved across the surface in the direction substantially perpendicular to the edge 5 and towards the post 9. The pressure applied against the tape causes the correction composition to adhere to the paper and the tip edge slides over the tape ribbon causing fresh tape to be drawn from the supply spool and laid down in front of the tip edge 5 while ribbon on the trailing side of the edge is reeled up by the take-up spool, the correction composition coating having been left on the paper surface. If the tip edge 5 is not oriented strictly perpendicular to the direction in which it is displaced across the paper surface, at any time during the stroke of the tip to lay down a

- 7 -

continuous strip of correction composition, the applicator element will pivot about the yaw axis Y which is substantially perpendicular to the paper surface and is defined by the hinge 10, to
5 establish or re-establish the correct orientation of the edge 5 perpendicular to the direction of motion. Consequently, the user is not required to maintain strict orientation of the holder throughout the displacement of the
10 dispenser to supply a continuous strip of correction composition.

The tip element of Figure 3 is fundamentally similar to that of Figures 2A and 2B, but the integral hinge is defined by the
15 element itself rather than at its connection to the mounting part which in this embodiment has the form of a plate 9. The blade member 4 defining the edge 5 is connected by the hinge 10 to a yoke member 11 defining a pair of arms 12
20 which engage with a snap fit into slots 13 provided in the plate 9. On the leading side of the edge 5 a guidance slot for the tape 1 is defined between the yoke member 11 and the plate 9 and on the trailing side of the edge the blade
25 member is provided with spaced wing-like protrusions 14 defining a channel to guide the tape. As in the first embodiment, the hinge 10 allows pivotal adjustment of the edge 5 about a predetermined axis to compensate for incorrect
30 orientation of the dispenser holder with respect to its direction of displacement in laying down a strip of correction composition. Because the hinge axis is closer to the edge 5 than in the first embodiment, the castoring effect tending
35 to dispose the edge perpendicular to the direction of movement will be reduced and the resilience of the hinge may be somewhat less.

- 8 -

In the embodiments of Figs 1, 2 and 3, the hinge 10 is preferably defined to exert a restoring force so that the edge of the application tip element is biased to a central normal rest position about the yaw axis. Alternatively, separate springs could be applied for this purpose. In addition, the hinge could be formed to permit a degree of rocking movement about a pitch axis generally perpendicular to the yaw axis and to the edge 5.

Figures 4 to 6 illustrate an embodiment of the invention including a bearing to allow pivotal movement of the application tip element about a pitch axis, and in this respect the correction tape dispenser is substantially as described in the above mentioned International application No. PCT/US94/06585. The supply and take-up spools are housed in the body or holder 20 from the forward end of which protrudes a tip element mounting in part 21 having tape guiding posts 22. The application edge 5 is formed on a tip element 4 having wings 14 for tape guidance on either side. A notch or slot in this element has a bearing surface 23 which cooperates with a complementary bearing surface 24 of a bearing member 25 to form a shell bearing defining a pitch axis P about which the element is able to rock freely. The pitch axis intersects the edge 5 and extends essentially in the direction in which the edge is moved over the paper surface. The bearing member 25 is also provided with a slot 26 into which is received a tongue 28 provided at the end of the mounting part 21. The tongue and slot have complementary arcuate side surfaces and cooperate to form a shell bearing defining a virtual yaw axis Y' which is substantially

- 9 -

perpendicular to the pitch axis P and to the edge 5, and which in use is substantially perpendicular to the paper surface and disposed a short distance in front of the edge 5. As
5 illustrated in Figs. 6A and 6B, the double shell bearing arrangement enables the application tip element 4 to adjust automatically to ensure the edge is applied flat against the paper by rocking about the pitch axis P and to ensure the
10 edge is perpendicular to the direction of displacement by pivoting about the yaw axis Y'.

Figure 7 illustrates a presently preferred embodiment of the invention. The tip element is basically as described above in
15 relation to Figure 3, with the integral hinge 10 defining the yaw axis Y. Instead of two arms engaging firmly in respective slots, the mounting plate 9 is provided with an arcuate slot 30 and the yoke arms are bifurcated to form
20 pairs of pegs 31 which are snap fitted into the slot 30. The pegs cooperate with the curved surfaces of the slot to form a shell bearing defining a pitch axis P perpendicular to the edge 5 and to the yaw axis Y. Due to the
25 freedom of pivotal movement permitted about the pitch and yaw axes, the tip element 4 can adjust automatically so that it is applied and maintained in correct orientation relative to the paper surface.

30 In the embodiments of Fig. 1-3 and 7 it is not essential for the hinges to be integrally formed and they could comprise separate parts if this is considered more convenient or desirable, e.g. to allow different
35 material for the support member tip element.

In each of the described embodiments, the supply and take-up spools can be disposed in

- 10 -

the dispenser body with guide means for guiding
the tape to the applicator edge as described in
our pending patent application No. GB 2275042,
so that the dispenser can be held in use in
5 similar orientation to that in which a writing
instrument is generally held.

- 11 -

C L A I M S

1. A tape dispenser for applying a strip of a coating composition to a substrate, comprising a holder containing a supply spool of
5 tape consisting of a carrier ribbon coated on one side with the coating composition, and a take-up spool for used tape consisting of carrier ribbon from which the coating composition has been removed, the tape being
10 guided to pass between the supply and take-up spools around an edge of an application tip element used to press the carrier ribbon against the substrate to transfer the coating composition onto the substrate, wherein the
15 application tip element is coupled to the holder for movement about a predetermined axis substantially aligned with the direction in which the application tip element is pressed against the substrate in use of the dispenser,
20 whereby frictional forces exerted on the application tip element during movement of the application tip element across the substrate surface cause the application tip element to move about said predetermined axis to maintain
25 the edge substantially perpendicular to the direction of said movement of the application tip element across the substrate surface.

2. A tape dispenser according to claim 1, wherein the predetermined axis is spaced in
30 front of the edge in the direction of movement across the substrate for applying the coating composition thereto.

3. A tape dispenser according to claim 1 or 2, wherein the application tip element is
35 coupled to a mounting part connected to the holder through bearing means defining said axis.


4. A tape dispenser according to claim 1

- 12 -

or 2, wherein the application tip element includes an integral hinge defining said predetermined axis.

5. A tape dispenser according to any one
5 of claims 1 to 4, wherein the application tip element is moveable about said predetermined axis to either side of a normal position into which said application tip element is biased.
6. A tape dispenser according to any one
10 of claims 1 to 5, wherein the application tip element is also pivotable relative to the holder about a pivot axis substantially perpendicular to said edge and to said predetermined axis.
7. A tape dispenser according to claim 6,
15 wherein said pivot axis substantially intersects said edge.
8. A tape dispenser according to claim 6 or 7, wherein said pivot axis is defined by a shell bearing connecting the applicator tip to a
20 mounting part attached to the holder.
9. A tape dispenser according to claims 6, 7 or 8, wherein the mounting part comprises an arcuate bearing slot and projections on the application tip element engage in said slot to
25 attach the application tip element to the support member.
10. A tape dispenser according to claim 9, wherein the projections are provided by a yoke member connected to the application tip element
30 by an integral hinge defining said predetermined axis.

1/5

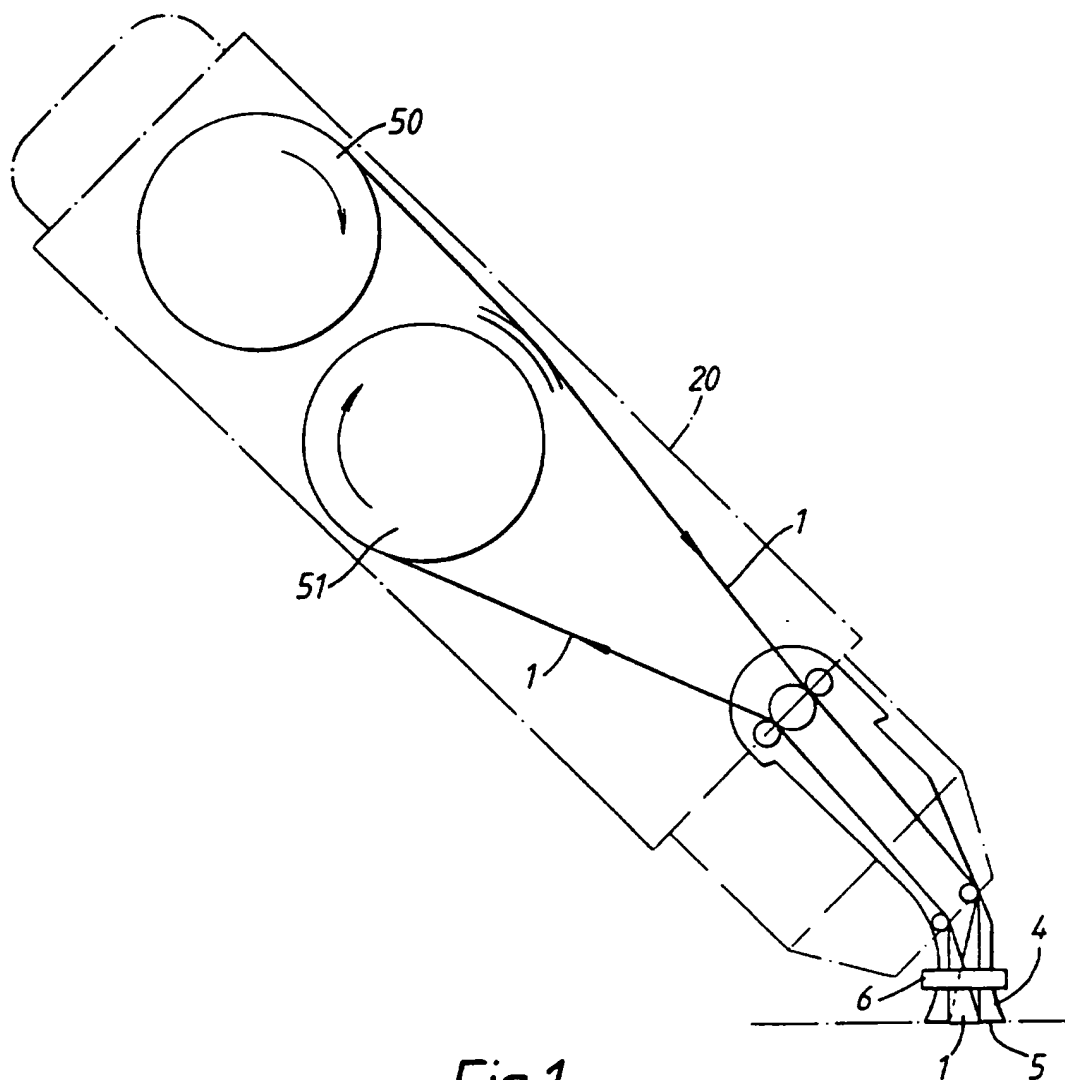

2/5

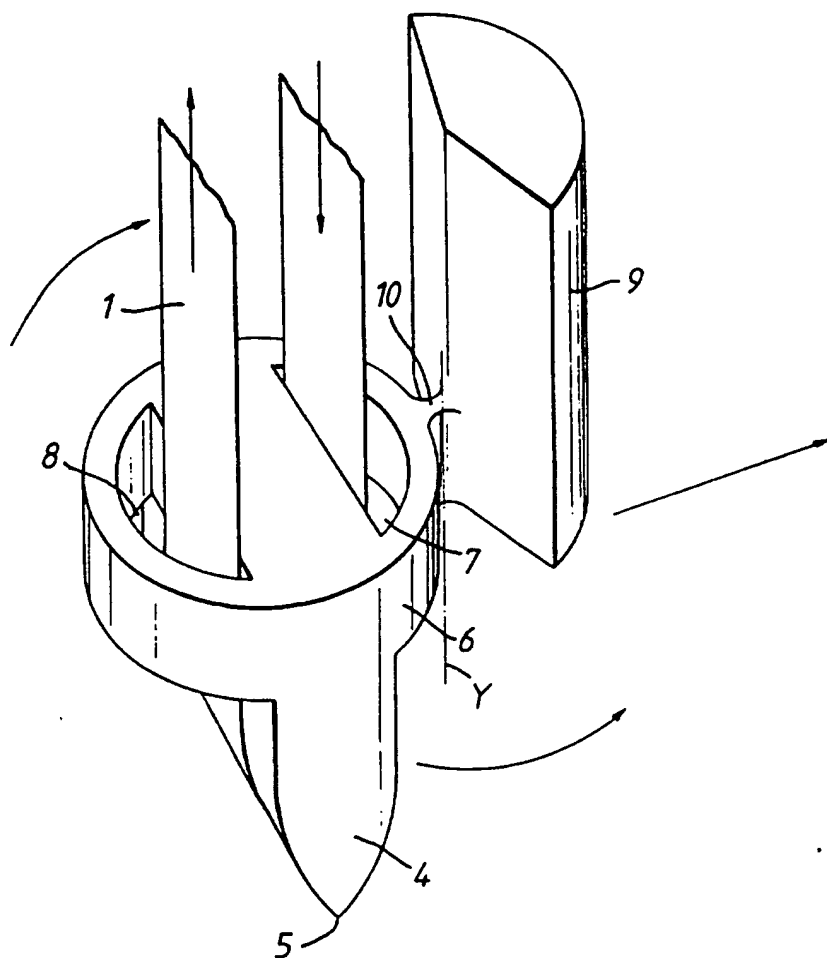


Fig. 2A

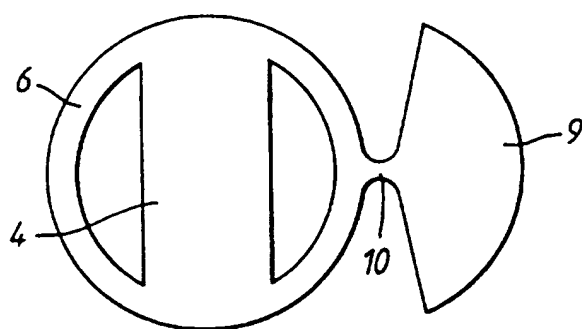


Fig. 2B

3/5

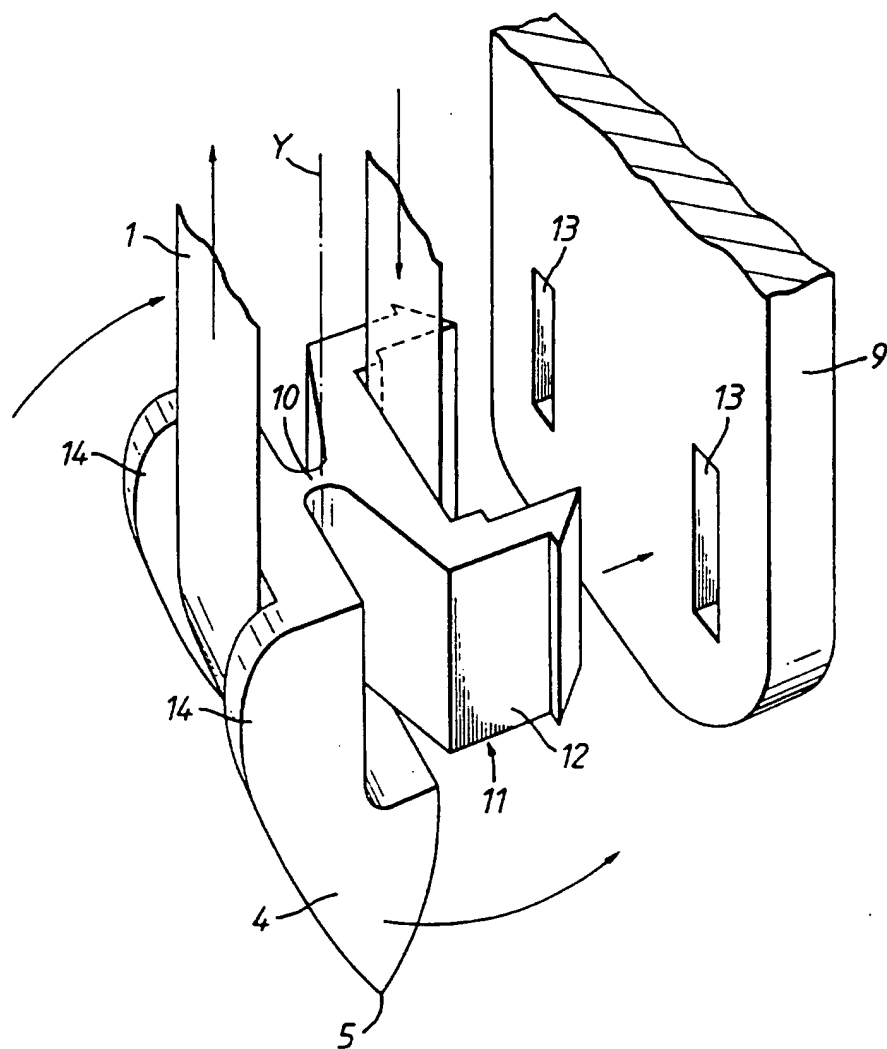


Fig. 3

4/5

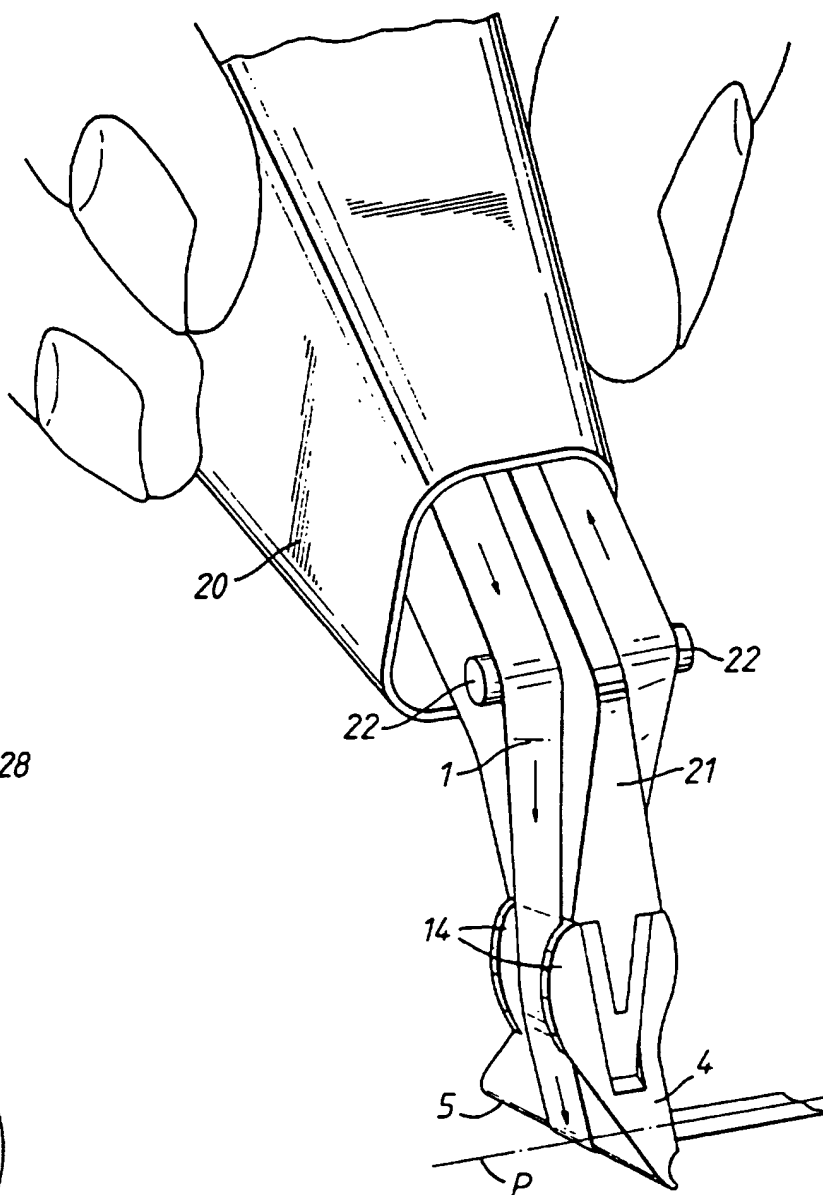


Fig.4

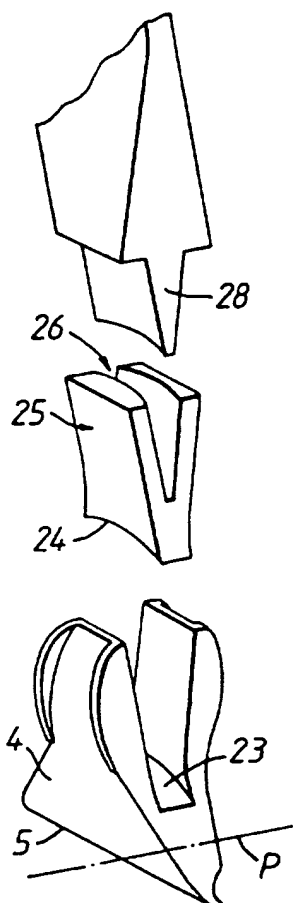


Fig.5

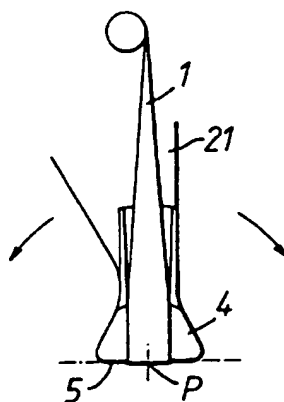


Fig. 6A




Fig. 6B

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 95/14539

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 B65H37/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 B65H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,X	EP,A,0 656 308 (SEED RUBBER COMPANY LTD) 7 June 1995 see column 17, line 36 - column 18, line 15; figures 18,19	1,3
A	--- EP,A,0 170 222 (S. TAMAI) 5 February 1986 see page 4, paragraph 2 - page 5, paragraph 1; figures 1-3	1,6
P,A	--- WO,A,95 00334 (THE GILLETTE COMPANY) 5 January 1995 cited in the application see the whole document	1,6-9
A	--- GB,A,2 275 042 (THE GILLETTE COMPANY) 17 August 1994 cited in the application see the whole document -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

25 March 1996

Date of mailing of the international search report

09. 04. 96

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentaan 2
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+ 31-70) 340-3016

Authorized officer

Raven, P

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No

PCT/US 95/14539

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A-656308	07-06-95	JP-A- 7157175 AU-B- 7911894	20-06-95 08-06-95
EP-A-170222	05-02-86	JP-C- 1820418 JP-B- 3011639 JP-A- 61057370 US-A- 4671687	27-01-94 18-02-91 24-03-86 09-06-87
WO-A-9500334	05-01-95	AU-B- 7105394	17-01-95
GB-A-2275042	17-08-94	DE-A- 4404103 JP-A- 6247610 US-A- 5393368	18-08-94 06-09-94 28-02-95